




REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/2	2018/12/12	ZJP	添加210151BK規格
A/3	2018/12/14	ZJP	更新65貼紙

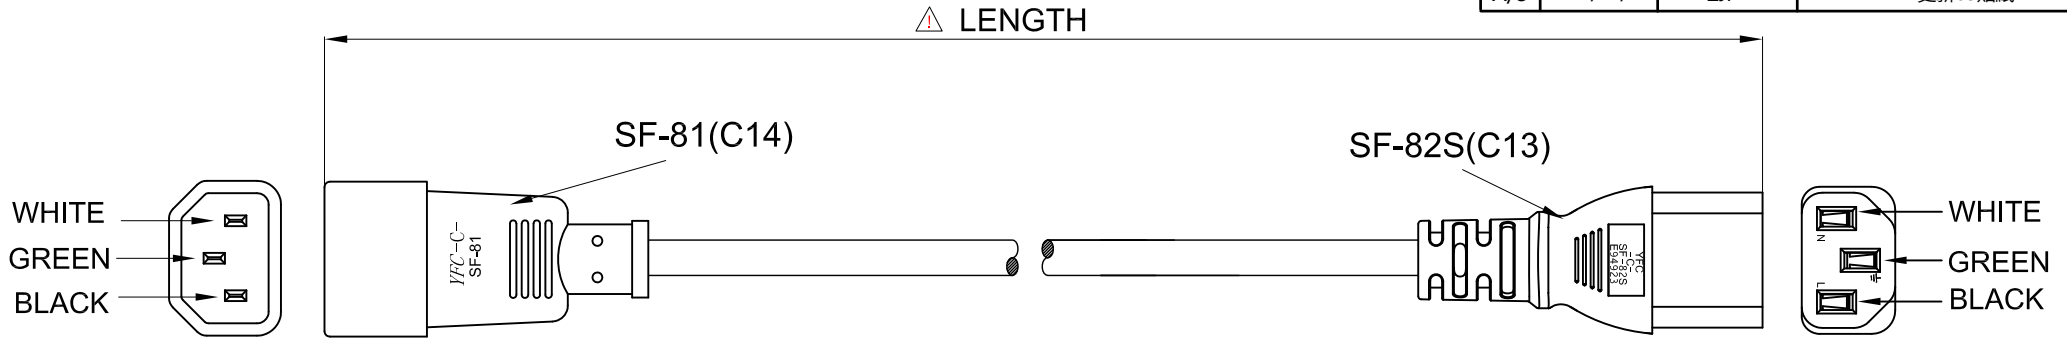

item NO.	length(mm)	tolerance(mm)	length(FT)
210151BK	305	15/-10	1
210152BK	910	15/-10	3
210153BK	1830	±20	6
210154BK	3050	±30	10

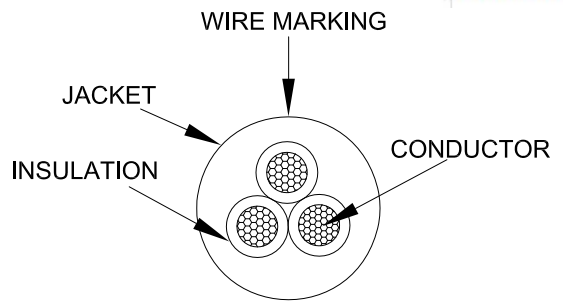

REMARKS:

- 1.PLUG(SF-81) RATED POWER:125V 13A
- 2.CONNECTOR(SF-82S) RATED POWER:125V/250V 13A
- 3.WIRE: SJT 3X16AWG 60°C RATED VOLTAGE:300V
- 4.DVW TEST:1500V,1S
- 5.POLARIZATION AND CONTINUITY TEST
- 6.COMPLY WITH IEC60320 STANDARD
- 7.COLOR: BLACK

WIRE MARKING (Hollow) NO.241	(UL) E135710-F3 SJT 3X16AWG 60°C 300V VW-1 c(UL) SJT 3X1.31mm2(16AWG) 60°C 300V FT2 YFC-BONEAGLE
------------------------------------	--



NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
③				
②				
①				

Unless specified on the drawing, tolerances are per the follows:
 .x +1
 .x +0.2
 .xx +0.05

DRAWN BY ZJP	DATE: 2018/12/14	DESCRIPTION: SF-81+SF-82S SJT 3X16AWG 60°C
CHECKED BY QinRao	SHEET 2 of 1	ITEM NO.
APPROVED BY	SCALE 1: 1	REV. 00 UNIT:mm