
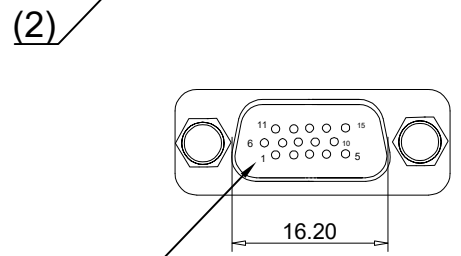
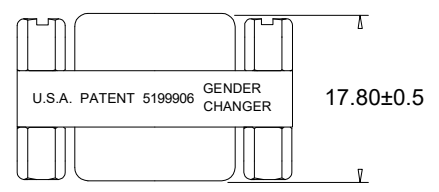
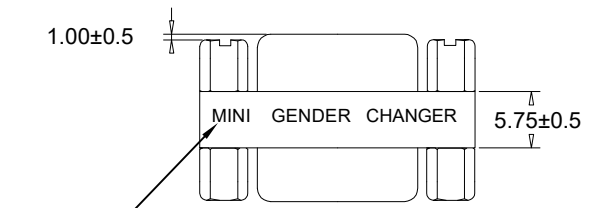
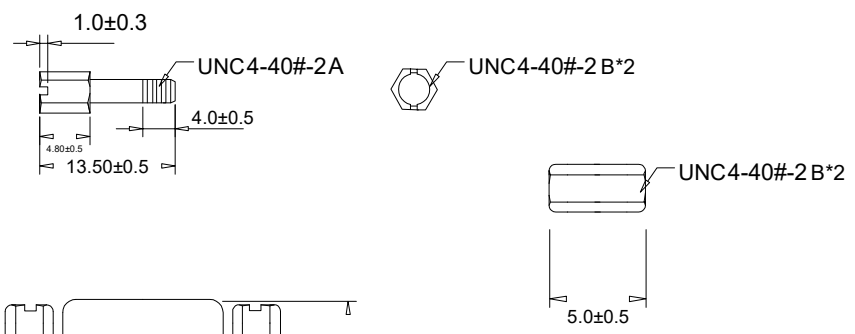


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
1.0	2022.04.07	Cheng Pu	DB15HD F/F Mini Gender Changer

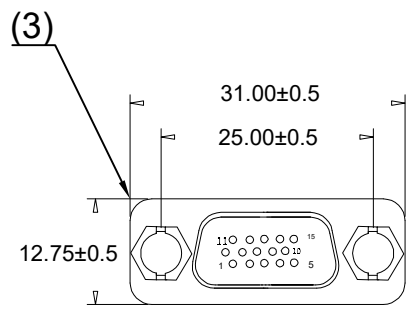

PIN ASSIGNMENT

HDB15F	HDB15F
1	1
2	2
3	3
4	4
5	5
6	6
7	7
...	...
14	14
15	15

Electronic data:
 Rating Current : 3 Amp
 Insulation Resistance: 1000MΩ min at 500 VDC
 Dielectric Strength: 1000V for 1 minute
 Operation Temperature: -55-+105°C

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	Jack	DB15P Female/SPCC with nickel plate	1	1
②	Label	Yellow color black character	1	1
①	Insulator	PBT+30%GF UL94V-0 Blue	2	1

DRAWN BY Mr. Kuo	DATE: 2022.02.23	DESCRIPTION: DB15HD Female/Female Mini Gender Changer
CHECK BY Mr. Liu	SHEET 1 of 1	ITEM NO. 271004
APPROVED BY John Lee	SCALE 2:1	REV. 00 UNIT: mm