


INSTALLATION INSTRUCTIONS

LCD Wall Mount

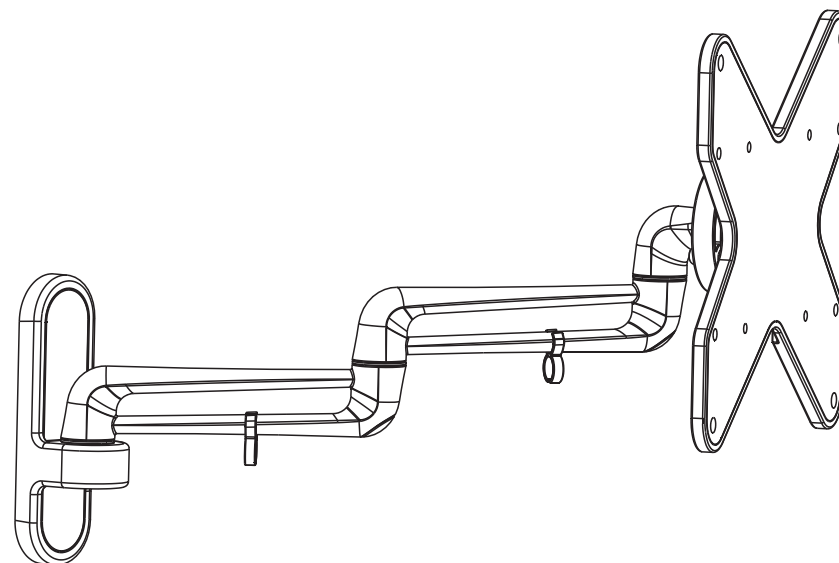

CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!

EAT2-222



100x100
200x100
200x200



ISSUED: OCT. 2012


NOTE: Read the entire instruction manual before you start installation and assembly.

WARNING


- Do not begin the installation until you have read and understood the instructions and warnings contained in this installation sheet. If you have any question regarding any of the instruction or warning, please contact your local distributor.
- This mounting bracket was designed to be installed and utilized **ONLY** as specified in this manual. Improper installation of this product may cause damage or serious injury.
- This product should only be installed by someone of good mechanical ability, with basic building experience and fully understanding of this manual.
- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- If mounting to wood wall studs, make sure that mounting screws are anchored into the center of the studs. The use of a stud finder is highly recommended.
- Always use assistant or mechanical lifting equipment to safely lift and position equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can damage the items, greatly reducing their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

Component Checklist


IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installing. If any parts are missing or faulty, telephone your local distributor for a replacement.

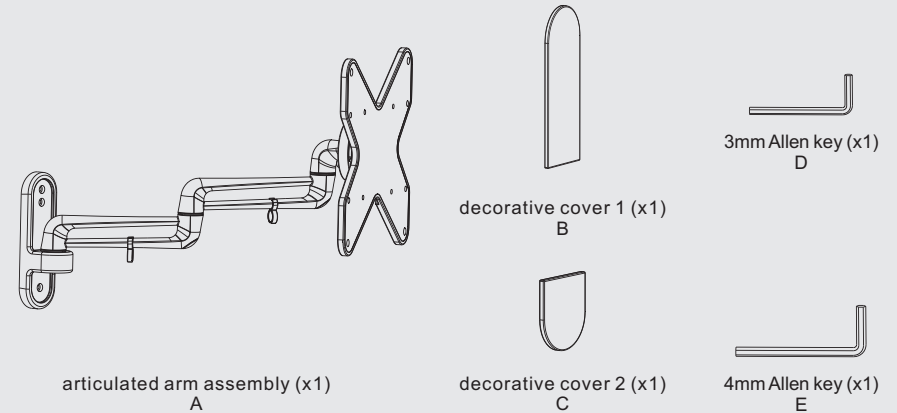


Package M

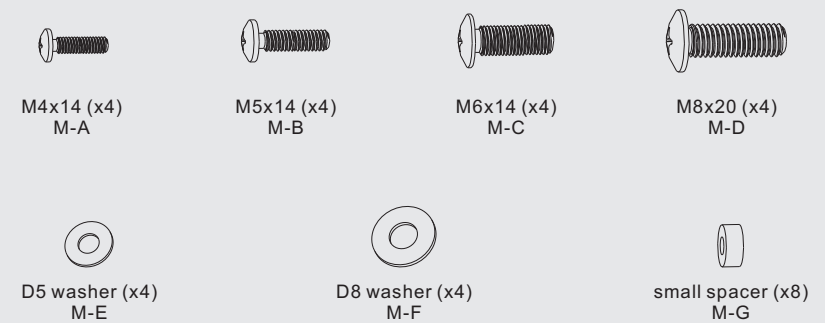


Package W

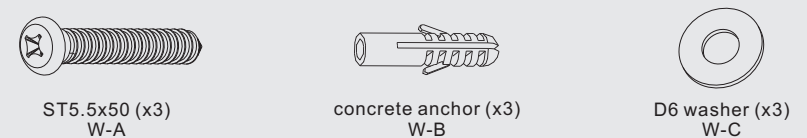

1. Separate the VESA Plate from the Wall Mount

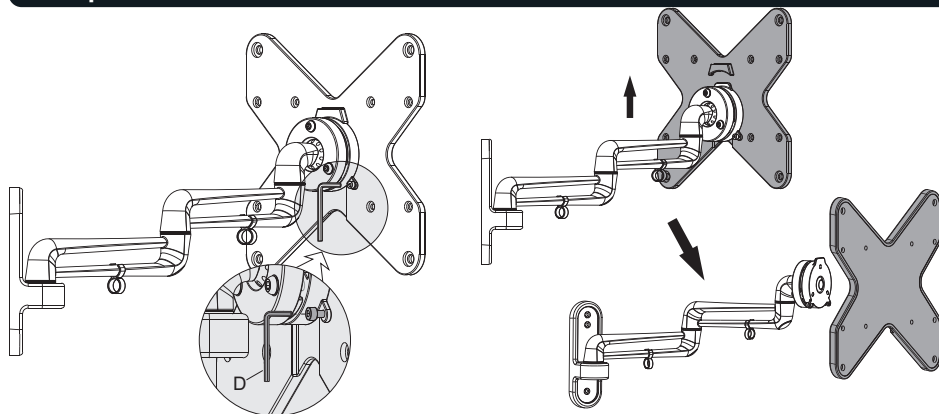


2a. Mount on Wood Stud Wall

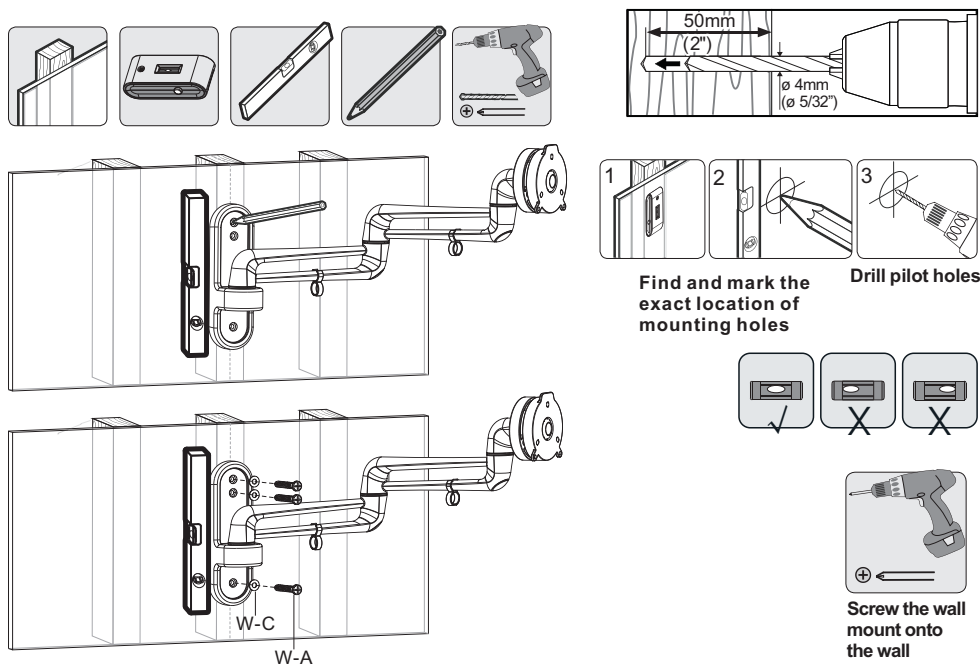

⚠ WARNING

- Make sure that mounting screws are anchored into the center of the studs. The use of a stud finder is highly recommended.
- Installers are responsible to provide hardware for other types of mounting situations.
- Installers must verify that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.


2b. Mount on Solid Brick and Concrete Block

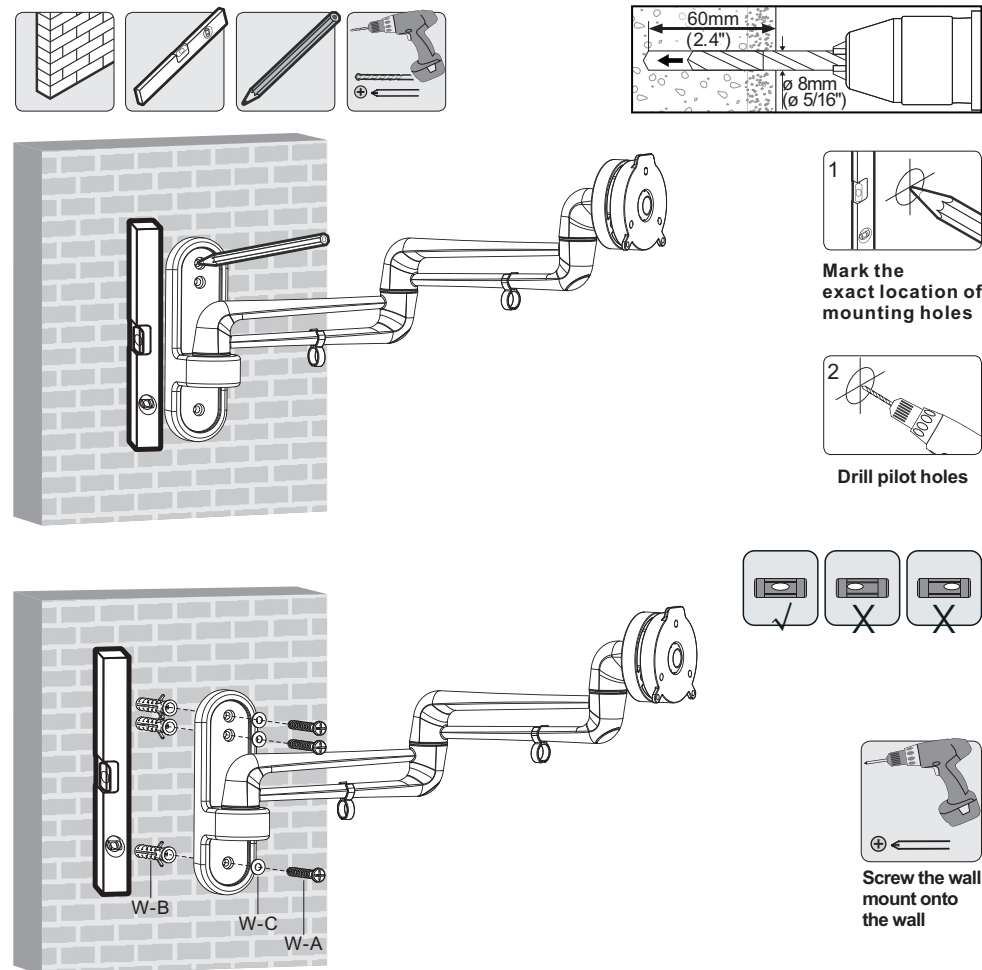

⚠ WARNING






- When installing wall mounts on cinder block, verify the actual concrete thickness is at least 1-3/8" (35mm) for using the concrete anchors. Do not drill into mortar joints! Be sure to mount in a solid part of the block, generally 1" (25mm) minimum from the side of the block. It is suggested electric drill on slow setting be used to drill the hole instead of a hammer drill to avoid breaking out the back of the hole when entering a void or cavity.
- Installers must verify that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.

3. Install the Decorative Covers

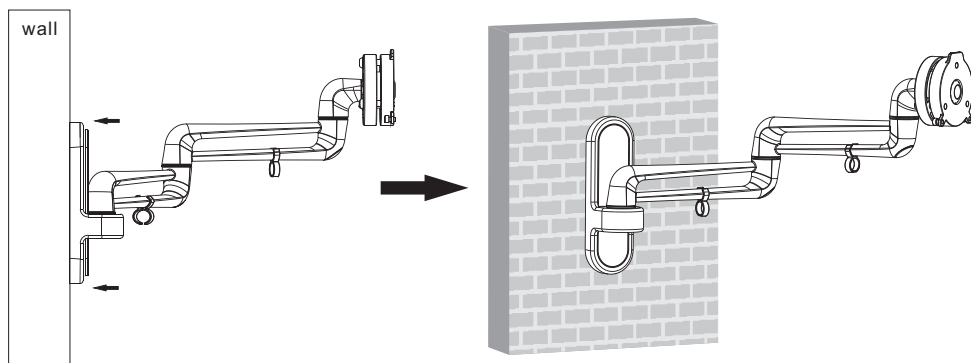

Install the decorative covers along wall plate rail until they fit onto the wall plate.

4. Install VESA Plate

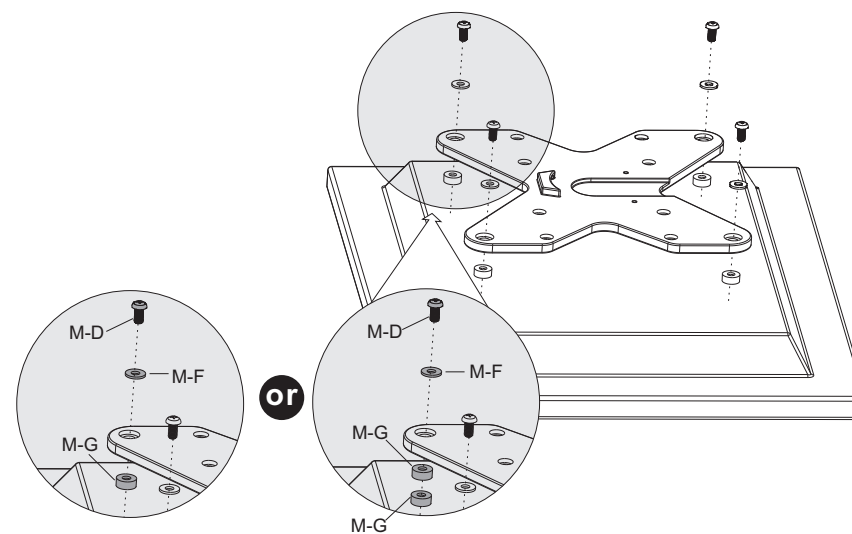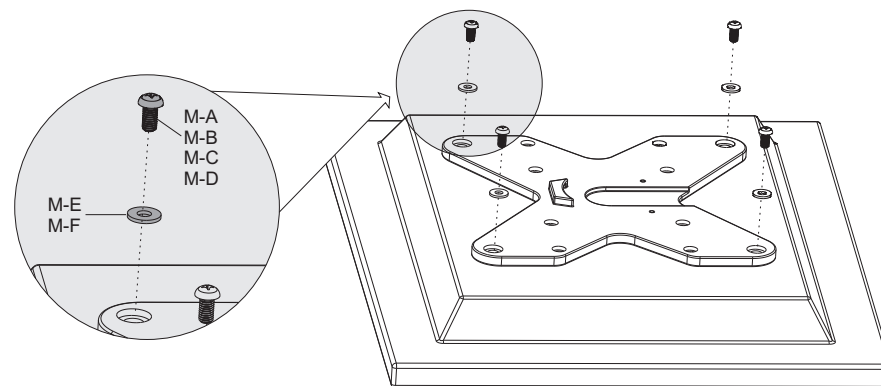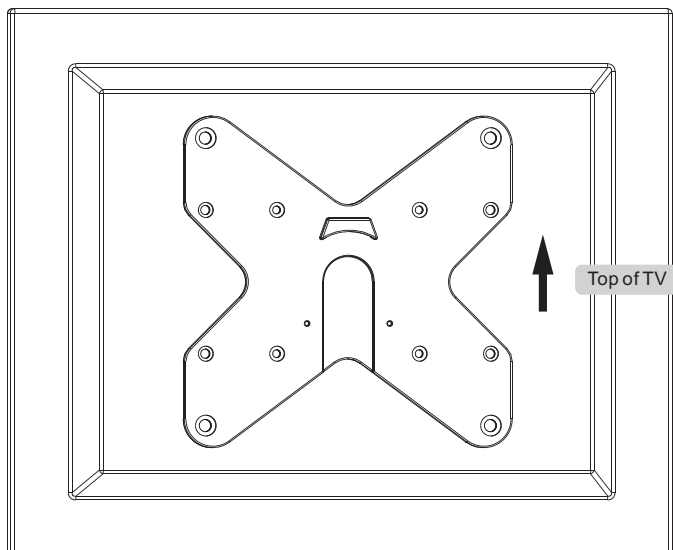


Note: Choose appropriate screws, washers and spacers (if necessary) according to the type of screen.

• Screw VESA plate onto the TV.




Tighten all screws but do not over tighten.

5. Hook the TV onto the Wall Mount

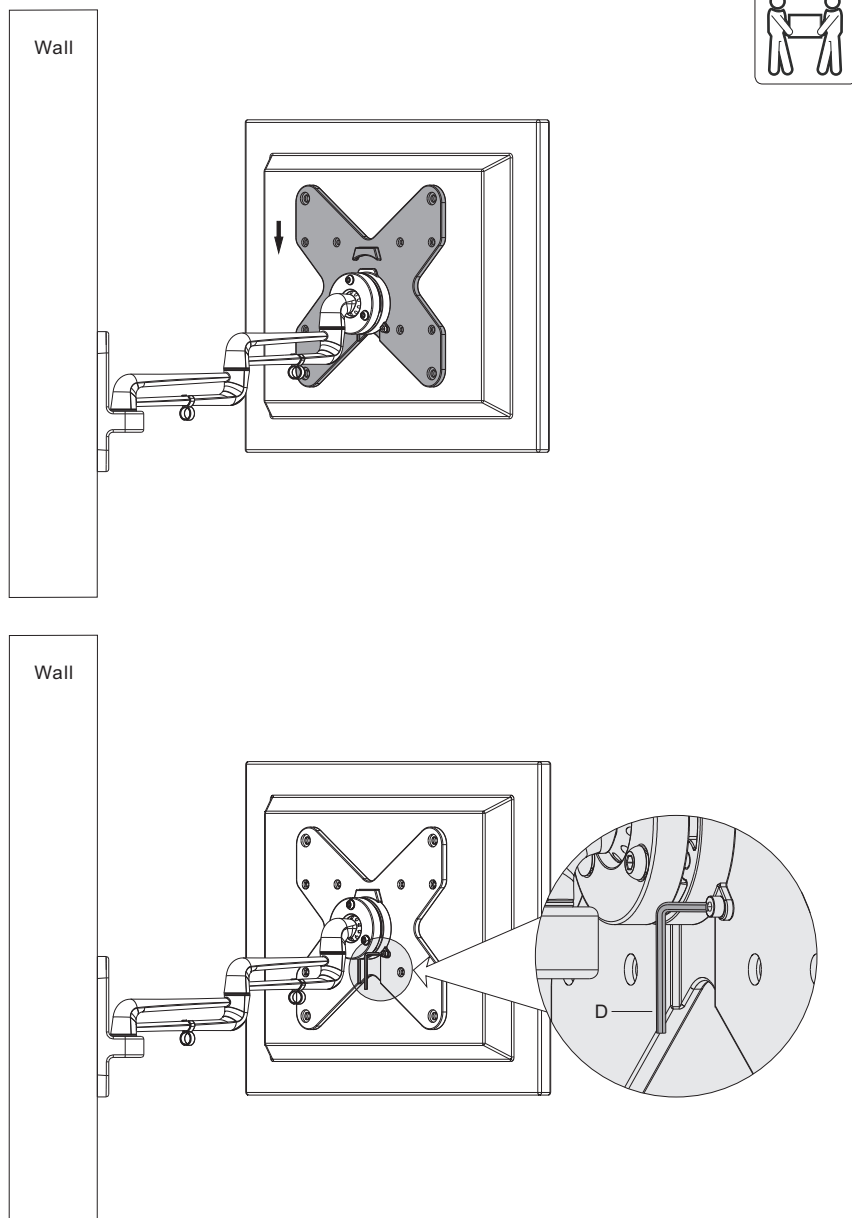


Carefully lift your TV and hook VESA plate onto the mounted head. Tighten screws (that is previously removed) to secure.

6. Cable Management

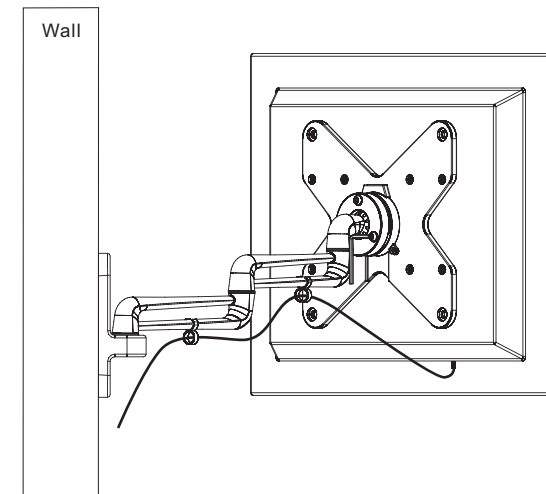


Connect cables to your TV and run cables through the wire clips.
Note: Leave slack in cable for arm movement.

7. Adjustment

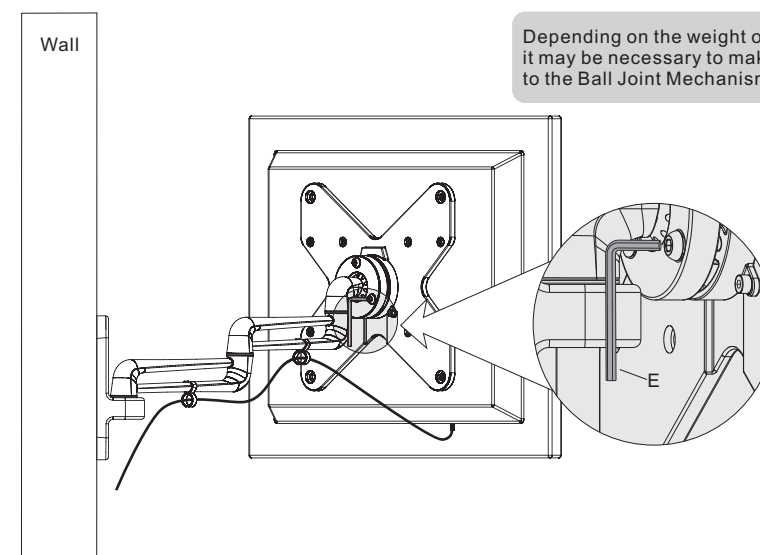

Depending on the weight of the display, it may be necessary to make adjustments to the Ball Joint Mechanism.

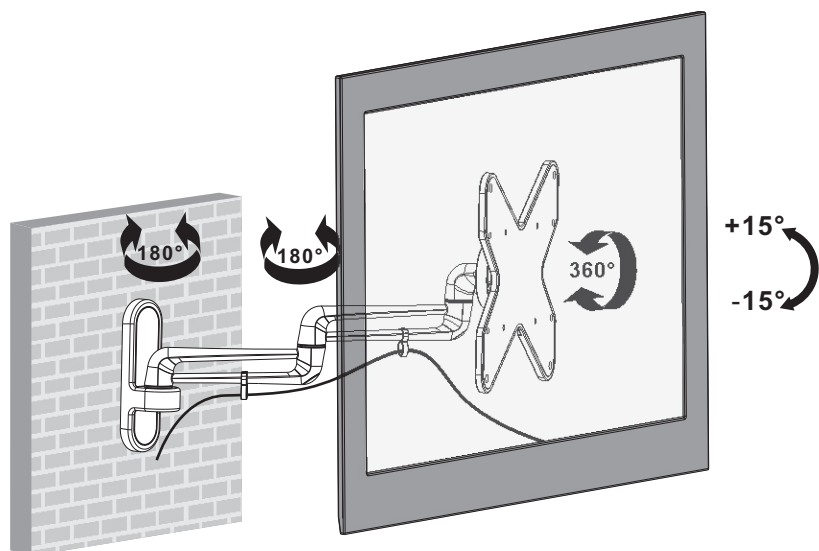

Adjust to desired location or tilt.

Maintenance

- Check that the bracket is secure and safe to use at regular intervals(at least every three months).
- Please contact your dealer if you have any questions.