



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW

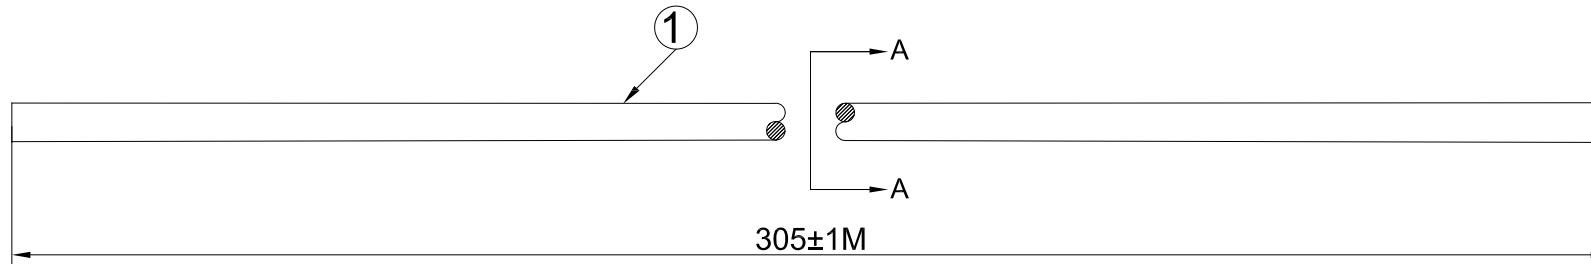

INK MARKING:YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 ETL/3P VERIFIED ▲ 24AWGX4P PATCH TYPE  
CMX(UL) C(UL) CMH E164469-XX XXXXFT

Jacket Color
BK012
BU608
GN509
GY177
PU720
RD210
WH928
YE406



INSULATION:HDPE Thickness:0.2±0.05MM  
OD=1.02±0.05mm

JACKET:PVC Thickness:0.5±0.1MM  
OD=5.8±0.2mm

CONDUCTOR:[24AWG(7/0.196±0.008mm) BC]X4P

SEC:A-A

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

conductor resistance:92↓(Ω/Km)at20°C

DRAWN BY LM	DATE: 2017/09/21	DESCRIPTION: LAN CABLE C6 UTP 24AWG 4P
CHECKED BY JZY	SHEET 1 of 1	ITEM NO. 101001X
APPROVED BY Lander	SCALE 1:1	REV. 00 UNIT:mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①	CABLE	CAT.6 UTP PVC 24AWG*4P BC	1	PC